



# Fischer Panda®

Perfect  
Power

## iSeries Marine Generators for Yachts

### Parallel iSeries Generators - Variable Speed Technology

The Panda iSeries generators have been especially designed to be compact, quiet and powerful - with up to 30 % weight and space savings! They are ideal for yacht owners who require low operating sound levels and vibrations.

The generators are characterised by their modern, innovative and environmentally friendly inverter technology.

The speed of the diesel engine is adjusted according to the user's changing power requirements while the output voltage always remains constant from the inverter. Variable speed control considerably reduces exhaust emissions and fuel consumption in comparison with a traditional generator with a fixed speed. The maximum speed of the engine is 2800 rpm. The electric load is provided with a constant output voltage of 230V/50 Hz or 120V/60 Hz via an inverter.

- Small size and low weight - compact installation
- Highly efficient - maximum energy
- Variable speed - load-dependent
- 230 V AC output - reliable power supply
- Pure sinus wave is ideal for sensitive electronics
- High starting capacity for air conditioners / compressors
- Easy to install - no forced air circulation required in machine room
- Environmentally friendly - low fuel consumption
- Optional CAN SAE J1939 interface

The iSeries generators are fitted with the renowned Fischer Panda sound insulation and water cooling.


### Parallel connected iSeries - the high performance solution for even more comfort and safety

Fischer Panda also offers Parallel-PMGi inverters as an option. This allows several iSeries generators of different types to be easily connected in parallel. Extra cables or additional cabinets are not required. Each generator is fully independent and can be individually operated.

- Multiple i-Series generators can be easily connected in parallel - even if they have different outputs (using parallel inverters - available as option)
- Load-Sharing: both generators are equally loaded when operating in parallel
- Ideal for applications (multihulls - catamarans, trimarans) which may benefit from installing various smaller generators to improve weight distribution



Connect in parallel for more power

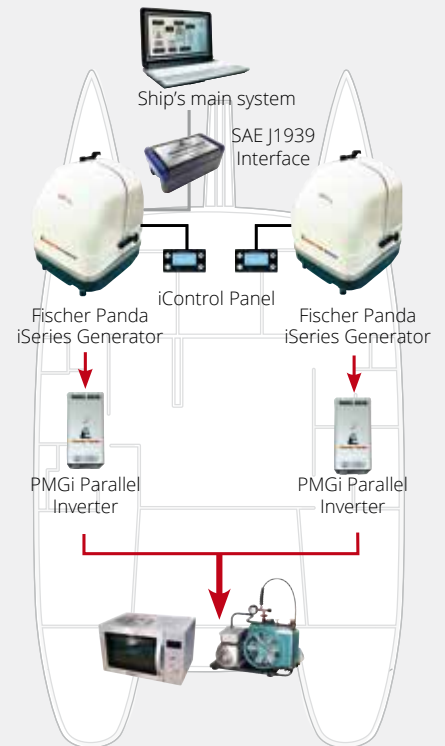



Model		Panda 5000i PMS	Panda 5000i.Neo PMS	Panda 8000i PMS	Panda 10000i PMS	Panda 15000i-230V PMS	Panda 15000i-400V PMS
Approx. capsule dimensions excl. fittings (LxWxH)	[mm]	600 x 399 x 406	422 x 450 x 508	520 x 445 x 545	540 x 445 x 555	650 x 465 x 589	650 x 465 x 589
Weight	[kg]	82	66,9 <sup>1)</sup>	105	111	160	160
Sound level (7m / 3m / 1m)	[dB]	54 / 64 / 68	54 / 64 / 68	52 / 62 / 67	54 / 64 / 68	54 / 64 / 68	54 / 64 / 68
Cooling system		Dual circuit freshwater cooling via heat exchanger					
Standard capsule		GFK 3D	GFK 3D	GFK 3D	GFK 3D	GFK 3D	GFK 3D
<b>Performance</b>							
Nominal output	[kW]	0-4,0 (5 kVA)*	0-4,0 (5kVA)*	0-6,4 (8 kVA)**	0-8,0 (10 kVA)*	0-12,0 (15 kVA)*	0-12,0 (15 kVA)*
Continuous output	[kW]	0-3,6*	0-3,6*	0-5,7**	0-7,2*	0-10,8*	0-10,8*
Output voltage	[V]	230 V	230 V	230 V	230 V	230 V	400 V
Voltage stability	[%]	± 3%	± 3%	± 3%	± 3%	± 3%	± 3%
Frequency stability	[%]	50 Hz ± 2%	50 Hz ± 2%	50 Hz ± 2%	50 Hz ± 2%	50 Hz ± 2%	50 Hz ± 2%
Voltage regulation		electronic					
Frequency regulation		electronic					
<b>Starter system</b>							
Starter system		12V electric starter					
Autostart		integrated					
Remote control panel		Panda iControl digital display					
Inverter		PMGi 5000	PMGi 5000	PMGi 8000	PMGi 10000	PMGi 15000	PMGi 15000
Inverter cooling		air-cooled	air-cooled	air-cooled	air-cooled	air-cooled	water-cooled
Inverter weight	[kg]	8.75	8.75	12	13.5	16	21
Inverter dimensions	[mm]	350 x 206 x 144	350 x 206 x 144	340 x 251 x 206	340 x 251 x 206	410 x 251 x 225	520 x 284 x 199
<b>Engine</b>							
Engine manufacturer		Kubota	Fischer Panda	Kubota	Kubota	Kubota	Kubota
Engine type		EA 300	FPE320	Z482	Z602	D902	D902
Engine displacement	[cm <sup>3</sup> ]	309	309	479	599	898	898
Speed	[rpm]	2400 - 2800	2400 - 2800	2400 - 2800	2400 - 2800	2200 - 2800	2000 - 2800
<b>Installation and service kits (You can find further options and accessories in the latest Fischer Panda Price List.)</b>							
Service Kit		21.03.10.001	request	21.03.10.003	21.03.10.055	21.03.10.062	21.03.10.062
Service-Kit "Plus"		21.03.10.011	request	21.03.10.015	21.03.10.057	21.03.10.042	21.03.10.042
Installation Kit "Basic"		21.03.04.080	21.03.04.080	21.03.04.080	21.03.04.080	21.03.04.080	21.03.04.080
Installation Kit "Premium" with exhaust/water separator		21.03.04.057	21.03.04.057	21.03.04.057	21.03.04.057	21.03.04.057	21.03.04.057
Shock-mounts, captive		32.30.01.002	32.30.01.002	32.30.01.002	32.30.01.005	32.30.01.005	32.30.01.005

Disclaimer: The information contained here is to the best of our knowledge accurate at the date of publication. All products are subject to continuous development and Fischer Panda GmbH reserves the right to alter technical specifications without prior notice.

1) Dry weight

\*) cosPhi 0,8 up to 40°C ambient temperature, other cosPhi 1 up to 50°C

\*\*\*) cosPhi 0,8 up to 40°C ambient temperature, other cosPhi 1 up to 45°C

01/2017



Fischer Panda GmbH  
Otto-Hahn-Str. 40  
D-33104 Paderborn  
Germany

Tel. : +49 (0)5254 9202-0  
Fax : +49 (0)5254 9202-550  
Hotline: +49 (0)5254 9202-767  
Email : info@fischerpanda.de  
Web : www.FischerPanda.de

